

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/NO04/000342

International filing date: 11 November 2004 (11.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: NO
Number: 20035047
Filing date: 13 November 2003 (13.11.2003)

Date of receipt at the International Bureau: 25 January 2005 (25.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



KONGERIKET NORGE
The Kingdom of Norway


Bekreftelse på patentsøknad nr
Certification of patent application no

▽
20035047

▷ Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 2003.11.13

▷ *It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 2003.11.13*

2005.01.05


Ellen B. Olsen
Saksbehandler

2003-11-13

6

Søknad om patent

www.patentstyret.no

PATENTSTYRET



Ferdig utfylt skjema sendes til adressen nedenfor. Vennligst ikke heft sammen sidene.
Vi ber om at blankettene utfylles *maskinelt* eller ved bruk av *blokkbokstaver*. Skjema for
utfylling på datamaskin kan lastes ned fra **www.patentstyret.no**.

03-11-13*20035047

Afm.tilgj. 18 MAI 2005

Søker Den som søker om patent blir også innehaver av en eventuell rettighet. Må fylles ut!

Foretakets navn (fornavn hvis søker er person):

Hamworthy KSE Gas Systems AS

Etternavn (hvis søker er person):

UV

☒ Kryss av hvis søker tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

F25 J

Adresse:

Solbråveien 10

Postnummer:

1383

Poststed:

Asker

Land:

☐ Kryss av hvis flere søkere er angitt i medfølgende skjema eller på eget ark.

☐ Kryss av hvis søker(ne) utfører mindre enn 20 årsverk (se veiledning).

☐ Kryss av hvis det er vedlagt erklæring om at patentsøker(ne) innehar retten til oppfinnelsen.

Kontaktinfo Hvem skal Patentstyret henvende seg til? Oppgi telefonnummer og eventuell referanse.

Fornavn til kontaktperson for fullmektig eller søker:

Hans

Etternavn:

Langan



Telefon:

2 2 9 1 0 4 0 0

Referanse (maks. 30 tegn):

E33357 HLA/UTH



Evt. adresse til kontaktperson:

Karl Johansgt. 25

P.O. Boks 765 Sentrum

Postnummer:

0106

Poststed:

Oslo

Land:

Fullmektig Hvis du ikke har oppnevnt en fullmektig, kan du gå til neste punkt.

Foretakets navn (fornavn hvis fullmektig er person):

Zacco Norway AS

Etternavn (hvis fullmektig er person):

☒ Kryss av hvis fullmektig tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Som over

Postnummer:

Poststed:

Land:

Oppfinner Oppfinneren skal alltid oppgis, selv om oppfinner og søker er samme person.

Oppfinnerens fornavn:

Carl Jørgen

Etternavn:

Rummelhoff

☐ Kryss av hvis oppfinner tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Veverbakken 157

Postnummer:

1536

Poststed:

Moss

Land:

☐ Kryss av hvis flere oppfinnere er angitt i medfølgende skjema eller på eget ark.

ADRESSE

Postboks 8160 Dep.
Københavngaten 10
0033 Oslo

TELEFON

22 38 73 00

TELEFAKS


22 38 73 01

BANKGIRO

8276 01 00192

ORGANISASJONSNR.

971526157 MVA



PATENTSTYRET®

Styret for det industrielle rettsvern

SØKNAD s. 1 av 2

FLERE SØKERE

FLERE OPPFINNERE

PRIORITETER

VEILEDNING



Tittel Gi en kort benevnelse eller tittel for oppfinnelsen (ikke over 256 tegn, inkludert mellomrom).

Tittel: *Apparat og metode for temperaturkontroll av kondensering av gasser*
Apparatus and method for controlling temperature in a boil-off gas

PCT Fylles bare ut hvis denne søknaden er en videreføring av en tidligere innlevert internasjonal søknad (PCT).

Inngivelsesdato (åååå.mm.dd): PCT / Søknadsnummer:

PCT-søknadens dato og nummer:

Prioritetskrav Hvis du ikke har søkt om denne oppfinnelsen tidligere (i et annet land eller i Norge) kan du gå videre til neste punkt.

Prioritet kreves på grunnlag av tidligere innlevert søknad i Norge eller utlandet:

Inngivelsesdato (åååå.mm.dd): Landkode: Søknadsnummer:

Opplysninger om tidligere søknad. Ved flere krav skal tidligste prioritet angis her.

☐ Flere prioritetskrav er angitt i medfølgende skjema, eller på eget ark.

Mikroorganisme Fylles bare ut hvis oppfinnelsen omfatter en mikroorganisme.

Søknaden omfatter en kultur av mikroorganisme. Deponeringssted og nummer må oppgis:

Deponeringssted og nummer (benytt gjerne eget ark):

☐ Prøve av kulturen skal bare utleveres til en særlig sakkyndig.

Avdelt/utskilt Hvis du ikke har søkt om patent i Norge tidligere, kan du gå videre til neste punkt.

Søknaden er avdelt eller utskilt fra tidligere levert søknad i Norge:

☐ Avdelt søknad Dato (åååå.mm.dd): Søknadsnummer:

☐ Utskilt søknad Informasjon om opprinnelig søknad/innsendt tilleggs materiale

Annet

☐ Søknaden er også levert per telefaks. Oppgi dato (åååå.mm.dd):

☐ Jeg har bedt om forundersøkelse. Oppgi nr (årstall - nummer - bokstav):

Vedlegg Angi hvilken dokumentasjon av oppfinnelsen du legger ved, samt andre vedlegg.


- ☒ Eventuelle tegninger i to eksemplarer Oppgi antall tegninger: 3
- ☒ Beskrivelse av oppfinnelsen i to eksemplarer
- ☒ Patentkrav i to eksemplarer ☐ Fullmaktsdokument(er)
- ☒ Sammendrag på norsk i to eksemplarer på engelsk ☐ Overdragelsesdokument(er)
- ☐ Dokumentasjon av eventuelle prioritetskrav (prioritetsbevis) ☐ Erklæring om retten til oppfinnelsen
- ☐ Oversettelse av internasjonal søknad i to eksemplarer (kun hvis PCT-felt over er fylt ut)

Dato/underskrift Sjekk at du har fylt ut punktene under «Søker», «Oppfinner» og «Vedlegg». Signer søknaden.

Sted og dato (blokkbokstaver):
Oslo, 13. november 2003
Navn i blokkbokstaver:

Signatur: *ZACCO*
ZACCO NORWAY AS
Lurid Miland

NB! Søknadsavgiften vil bli fakturert for alle søknader (dvs. at søknadsavgiften ikke skal følge søknaden).
Betalingsfrist er ca. 1 måned, se faktura.



PATENTSTYRET
Styret for det industrielle rettsvern

1C

PATENTSTYRET

03-11-13*20035047

hla/uth

13.11.2003

E33357

Hamworthy KSE Gas Systems AS
Sølbråveien 10
1383 Asker

Inventor: Carl Jørgen Rummelhoff
Veverbakken 157
1536 Moss

Apparatus and method for controlling temperature in a boil-off gas

The invention relates to the field of reliquefaction of boil-off gases in liquid natural gas (LNG) plants, and more specifically to a method and apparatus for controlling the temperature in a boil-off gas.

- 5 A common technique for transporting natural gas from its extraction site, is to liquefy the natural gas at or near this site, and transport the LNG to the market in specially designed storage tanks, often placed aboard a sea-going vessel.

10 The process of liquefying the natural gas involves compression and cooling of the gas to cryogenic temperatures (e.g. -160°C). The LNG carrier may thus transport a significant amount of liquefied gas to its destination. At this destination, the LNG is offloaded to special tanks onshore, before it is either transported by road or rail on LNG carrying vehicles or revaporized and transported by e.g. pipelines.

- 15 LNG boils at slightly above -163°C at atmospheric pressure, and is usually loaded, transported and offloaded at this temperature. This requires special materials, insulation and handling equipment in order to deal with the low temperature and the boil-off vapour. Due to heat leakage, the cargo (LNG) surface is constantly boiling, generating vaporized natural gas ("boil-off") from the LNG (e.g. methane).

- 20 Plants for the continuous liquefaction of this boil-off gas are well known. The liquefaction of boil-off gases on LNG carriers results in increased cargo deliveries and allows the operator to choose the most optimal carrier propulsion system. LNG carriers have traditionally been driven by steam turbines, and the boil-off gases from the LNG cargo have been used as fuel. This has been considered a costly solution.

- One such alternative to using the boil-off gas as fuel is the Moss RSTM Concept, wherein the boil-off gas is liquefied and the resulting LNG is pumped back to the cargo tanks. The Moss RSTM Concept, illustrated in figure 1, is based on a closed nitrogen expansion cycle, extracting heat from the boil-off gas. The flow diagram in figure 1 shows all the equipment located in the cargo machinery deck house. Boil-off gas (BOG) is removed from the cargo tanks by two conventional LD compressors operating in series. The BOG is cooled and condensed to LNG in a cryogenic heat exchanger ("cold box"), to a temperature between the saturation temperature for compressed CH_4 and N_2 before being fed into a separator vessel where certain non-condensibles (mainly N_2) is removed. The LNG coming out of the separator is pumped back to the cargo tanks,
- 30
35

while the non-condensibles (i.e. gases) are sent to a flare or vent stack. Reference is also made to Norwegian Patent 30 55 25.

European Patent Application EP 1 132 698 A1 discloses a plant for reliquefying
5 compressed vapour, where means are incorporated to mitigate the problems that arise
when vapour is returned with condensed natural gas to the LNG storage tank. Liquefied
natural gas is stored in an insulated tank, typically forming part of an ocean going
tanker. Boiled off vapour is compressed in a compressor and at least partially condensed
in a condenser. The resulting condensate is returned to the tank. The vapour is mixed
10 with liquefied natural gas in a mixing chamber upstream of the compressor. The
liquefied natural gas so mixed with the vapour in the mixing chamber is taken from the
condensate or from the storage tank.

International Patent Application WO 02/095285 discloses an apparatus and a method
15 for controlling the pressure in the cargo tank of an LNG carrier.

As stated above, LNG boils at slightly above -163°C at atmospheric pressure. Thus, the
temperature of the boil-off gas upon entry into the liquefaction plant is typically in the
range -140°C to -100°C . The plant's compressors (e.g. LD compressors) are thus
20 designed for such approximate temperature range.

It has, however, been discovered that the boil-off gas temperature fluctuates
considerably, and values far outside the above range are not uncommon. This is
particularly the case during the ballast voyage, where the cargo tanks are virtually
25 empty and easily pick up high temperatures. The vapour header running from each of
the cargo tanks have some un-insulated areas that cause a significant temperature
increase in the boil-off gas. The vapour header is designed for a vapour flow
significantly larger than the boil-off gas flow, thus the resident time of the boil-off gas
is high in the vapour header and consequently the heat transfer to the gas is accordingly
30 high.

For example, temperatures as high as -40°C have been recorded at the compressor inlet.
Such high temperatures are unfortunate, given that the compressors are designed for
much lower temperatures. It is therefore desirable to control the temperature of the boil-
35 off gas prior to its entry into the compressor, to a greater extent than what thus far has
been possible and considered necessary.

The present invention meets the above need, in that it provides a method for controlling temperature in a boil-off gas in a liquefaction plant prior to compression, wherein boil-off gas originating from an LNG storage tank is compressed and at least partially condensed, and wherein said condensed boil-off gas (LNG) is being returned to the storage tank. The method is characterized by heat exchanging boil-off gas with said LNG, wherein the boil-off gas temperature is lowered and said LNG at least partially evaporated; and controllably mixing LNG with said boil-off gas upstream of said heat exchange,.

10 The present invention thus also provides an apparatus for controlling temperature in a boil-off gas in a liquefaction plant prior to compression, wherein boil-off gas from an LNG storage tank is fed via a feed line into at least one compressor and where the compressed gas is further fed into a heat exchanger for at least partial condensation, and where said condensed boil-off gas (LNG) is being returned to the storage tank via a return line. The apparatus of the invention is characterized by a heat exchanger
15 connected to the boil-off gas feed line, between the LNG storage tank and the compressor; a first conduit fluidly connecting the line for returning LNG to the storage tank and the heat exchanger; a second conduit fluidly connecting the heat exchanger to the boil-off gas feed line, at a point upstream of said heat exchanger; said first and
20 second conduits being fluidly connected via a cooler in said heat exchanger, and wherein the boil-off gas is heat exchanged against said cooler prior to being fed into said compressor.

Preferred embodiments of the method and the apparatus of the invention are described
25 in the dependent claims.

An embodiment of the invention will now be described in more detail, with reference to the accompanying drawings, where like parts have been given like reference numbers.

30 Figure 1 illustrates a prior art LNG reliquefaction system, as described in the introduction above.

Figure 2 is a principle flow diagram of a liquefaction plant incorporating the apparatus according to the invention.

35

Figure 3 is a principle sketch of the cooler/heat exchanger according to the invention.

In figure 2, a liquefaction plant incorporating the apparatus according to the invention is shown. Evaporated LNG (i.e. boil-off gases) flows from a storage tank (not shown) and into the plant. In the customary fashion, the boil-off gas is compressed in the LD compressor 10. Like for the prior art system, the boil-off gas is then cooled against a coolant (e.g. nitrogen gas) in the cryogenic heat exchanger ("cold box") 30. The coolant is managed by the circuit on the right-hand side of the cold box, comprising the multi-stage compressor 40 with intermediate coolers, and the expander 40, as the skilled reader readily will recognize.

10 The cold box 30 produces LNG, but the boil-off gas may not have been completely liquefied: Some portions of gas (predominantly nitrogen and methane) remain together with the LNG flowing out of the cold box. Hence, the nitrogen separator 80 and the associated control unit 70 are customarily included in the circuit. Subsequent of any necessary and desirable process steps, as may vary depending on the application, LNG is returned to the storage tank. This is indicated at the lower left-hand side of figure 2.

The invention comprises the heat exchanger 20 connected to the the boil-off gas feed line, between the LNG storage tank and the compressor 10. As shown in figure 2, a conduit 22 fluidly connects the line for returning LNG to the storage tank and the heat exchanger 20. A second conduit 26 fluidly connects the heat exchanger 20 to the boil-off gas feed line at a point upstream of the heat exchanger 20.

Turning now to figure 3, key parts of the heat exchanger 20 are shown. It generally comprises a chamber 29 holding a cooler 24; in this embodiment, a pipe cooler. LNG/condensed boil-off from the nitrogen separator is fed into the cooler via the conduit 22. Boil-off gas from the storage tank is fed into the chamber 29 via the inlet 27. The boil-off gas, which as stated above may hold a temperature as high as -40°C , is then cooled in heat exchange with the LNG flowing through the cooler 24. The cooled boil-off gas is evacuated from the chamber through the outlet 91. A drip catcher 28, as a precaution against droplets inadvertently entering the compressors, is also shown.

LNG flowing into the cooler 24 may have a temperature in the order of e.g. -159°C . The LNG will evaporate partially or completely in the cooler 24 during heat exchange with boil-off gas. The gas will not overheat, i.e. the gas- and liquid temperatures are equal. Due to the continuous flow through the cooler 24, the LNG temperature is virtually constant.

The mixture of LNG and evaporated natural gas flowing out of the cooler 24, is injected into the boil-off stream as shown in figure 3 – at a rate controlled by the valve 25, and fed into the chamber 29 as described above. Any residual liquids will gravitate out of the chamber 29 through the drain 92.

In order to keep the temperature in the boil-off gas entering the compressor within a prederemined range (as indicated above), the temperature is measured downstream of the heat exchanger 20 (as shown in figure 2) and the control valve (choke valve) 25 in the conduit 26 is thus adjusted by the control unit 60. Thereby, the flow rate through the conduit 26 and into the boil-of gas feed line is controlled.

The invented apparatus does not require any major alterations to the liquefactuion plant. The BOG compressors, associated gears, etc. may also be of the same size as with the prior art plants. Although the cooler 24 is depicted as a pipe cooler, the skilled person will appreciate that any suitable cooler may be used.

With the present invention, a selected temperature or range of temperatures - for example determined by the compressor characteristics – may be used as a controlling parameter for the choke valve in order to control the flow through the cooler and into the boil-off gas feed line upstream of the heat exchanger.



C l a i m s

1.

A method for controlling temperature in a boil-off gas in a liquefaction plant prior to
 5 compression, wherein boil-off gas originating from an LNG storage tank is compressed
 and at least partially condensed, and wherein said condensed boil-off gas (LNG) is
 being returned to the storage tank, said method being

c h a r a c t e r i z e d b y :

heat exchanging boil-off gas with said LNG, wherein the boil-off gas temperature is
 10 lowered and said LNG at least partially evaporated; and controllably (25, 60) mixing
 LNG with said boil-off gas upstream of said heat exchange.

2.

The method of claim 1, c h a r a c t e r i z e d b y :

15 maintaining a continuous flow of LNG and boil-off gas in said heat exchange, whereby
 the LNG temperature is substantially constant.

3.

The method of claim 1, c h a r a c t e r i z e d b y :

20 controlling (25, 60) the mixing rate based on comparing the temperature of the boil-off
 gas downstream of said heat exchange, with a predetermined temperature or range of
 temperatures.

4.

25 An apparatus for controlling temperature in a boil-off gas in a liquefaction plant prior to
 compression, wherein boil-off gas from an LNG storage tank is fed via a feed line into
 at least one compressor (10) and where the compressed gas is further fed into a heat
 exchanger (30) for at least partial condensation, and where said condensed boil-off gas
 (LNG) is being returned to the storage tank via a return line, said apparatus being

30 c h a r a c t e r i z e d b y a heat exchanger (20) connected to the
 the boil-off gas feed line, between the LNG storage tank and the compressor (10); a first
 conduit (22) fluidly connecting the line for returning LNG to the storage tank and the
 heat exchanger (20); a second conduit (26) fluidly connecting the heat exchanger (20) to
 the boil-off gas feed line, at a point upstream of said heat exchanger (20); said first (22)
 35 and second (26) conduits being fluidly connected via a cooler (24) in said heat
 exchanger (20), and wherein the boil-off gas is heat exchanged against said cooler (24)
 prior to being fed into said compressor (10).

5.

The apparatus of claim 4, characterized by a control valve (25) in said second conduit (26), for controlling the LNG flow rate into the boil-off gas feed line.

5

6.


The apparatus of claims 4 and 5, characterized by a control unit (60) connected to the control valve (25) and the boil-off gas feed line downstream of the heat exchanger (20) and upstream of said compressor (10), whereby the LNG flow rate into the boil-off gas feed line is controllable based on the sensed temperature of the boil-off gas in the feed line downstream said heat exchanger (20).

10

7.

The apparatus of claim 4, characterized in that the heat exchanger (20) additionally comprises a boil-off gas inlet (27), a chamber (29) and a drain (92) upstream of said cooler (24), and a drip catcher (28) between said heat exchanger (24) and an outlet (91), whereby boil-off gas is cooled by heat exchange with the cooler (24).

15

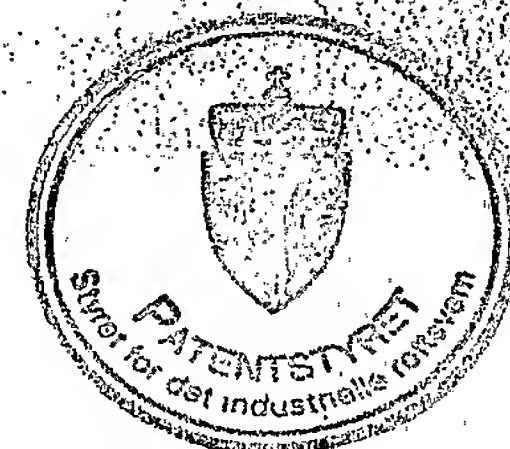


Abstract

O. nr. E33357

An apparatus and method for controlling temperature in a boil-off gas in a liquefaction plant prior to compression, wherein boil-off gas originating from an LNG storage tank is compressed and at least partially condensed, and wherein said condensed boil-off gas (LNG) is being returned to the storage tank. A heat exchanger (20) is connected to the the boil-off gas feed line upstream of the compressor (10), and a first conduit (22) fluidly connects the line for returning LNG to the storage tank and the heat exchanger (20). A second conduit (26) fluidly connects the heat exchanger (20) to the boil-off gas feed line at a point upstream of said heat exchanger (20). Boil-off gas is heat exchanged against said cooler (24) prior to being fed into said compressor (10). Thus, the boil-off gas temperature is lowered downstream of said heat exchange. With the present invention, a selected temperature or range of temperatures - for example determined by the compressor characteristics - may be used as a controlling parameter for the choke valve in order to control the flow through the cooler and into the boil-off gas feed line upstream of the heat exchanger.

(Fig. 2)

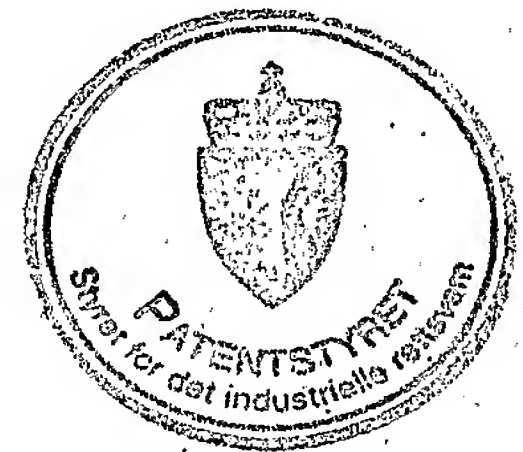

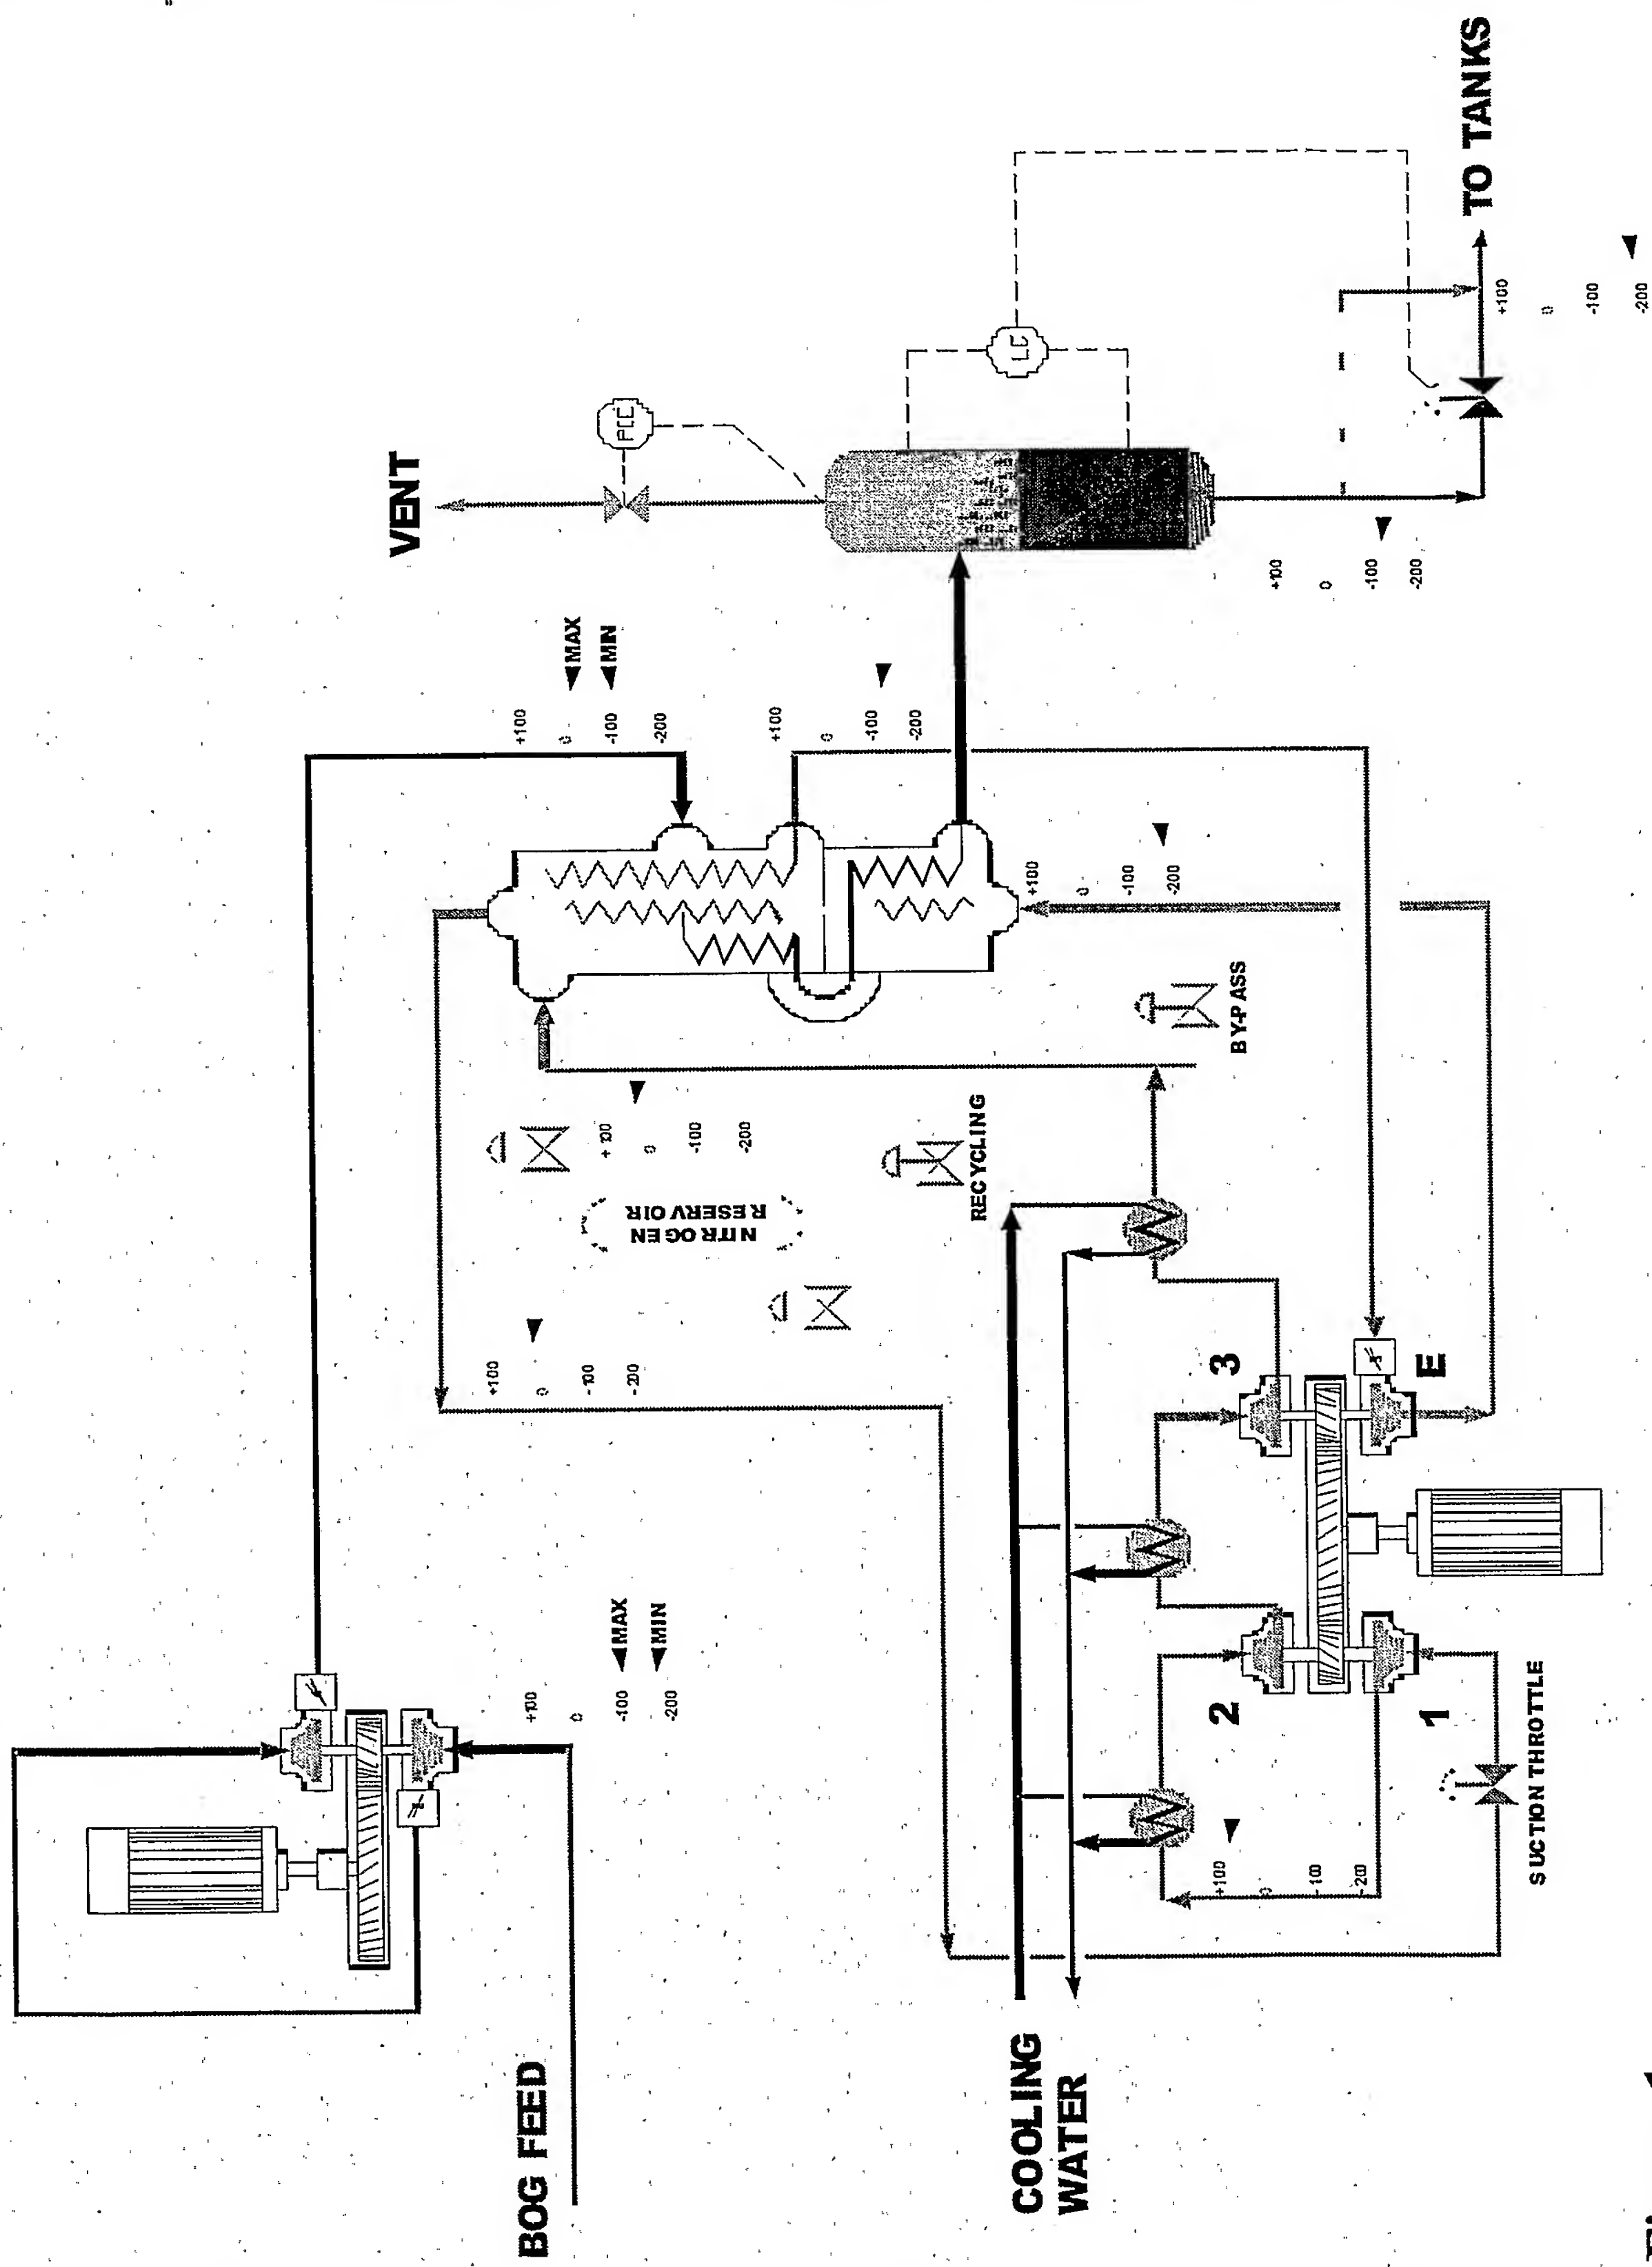
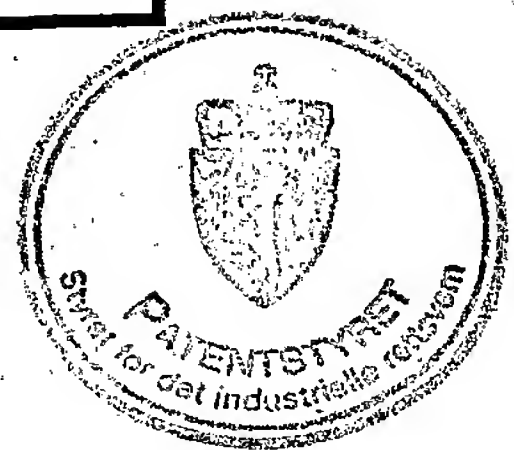


Figure 1



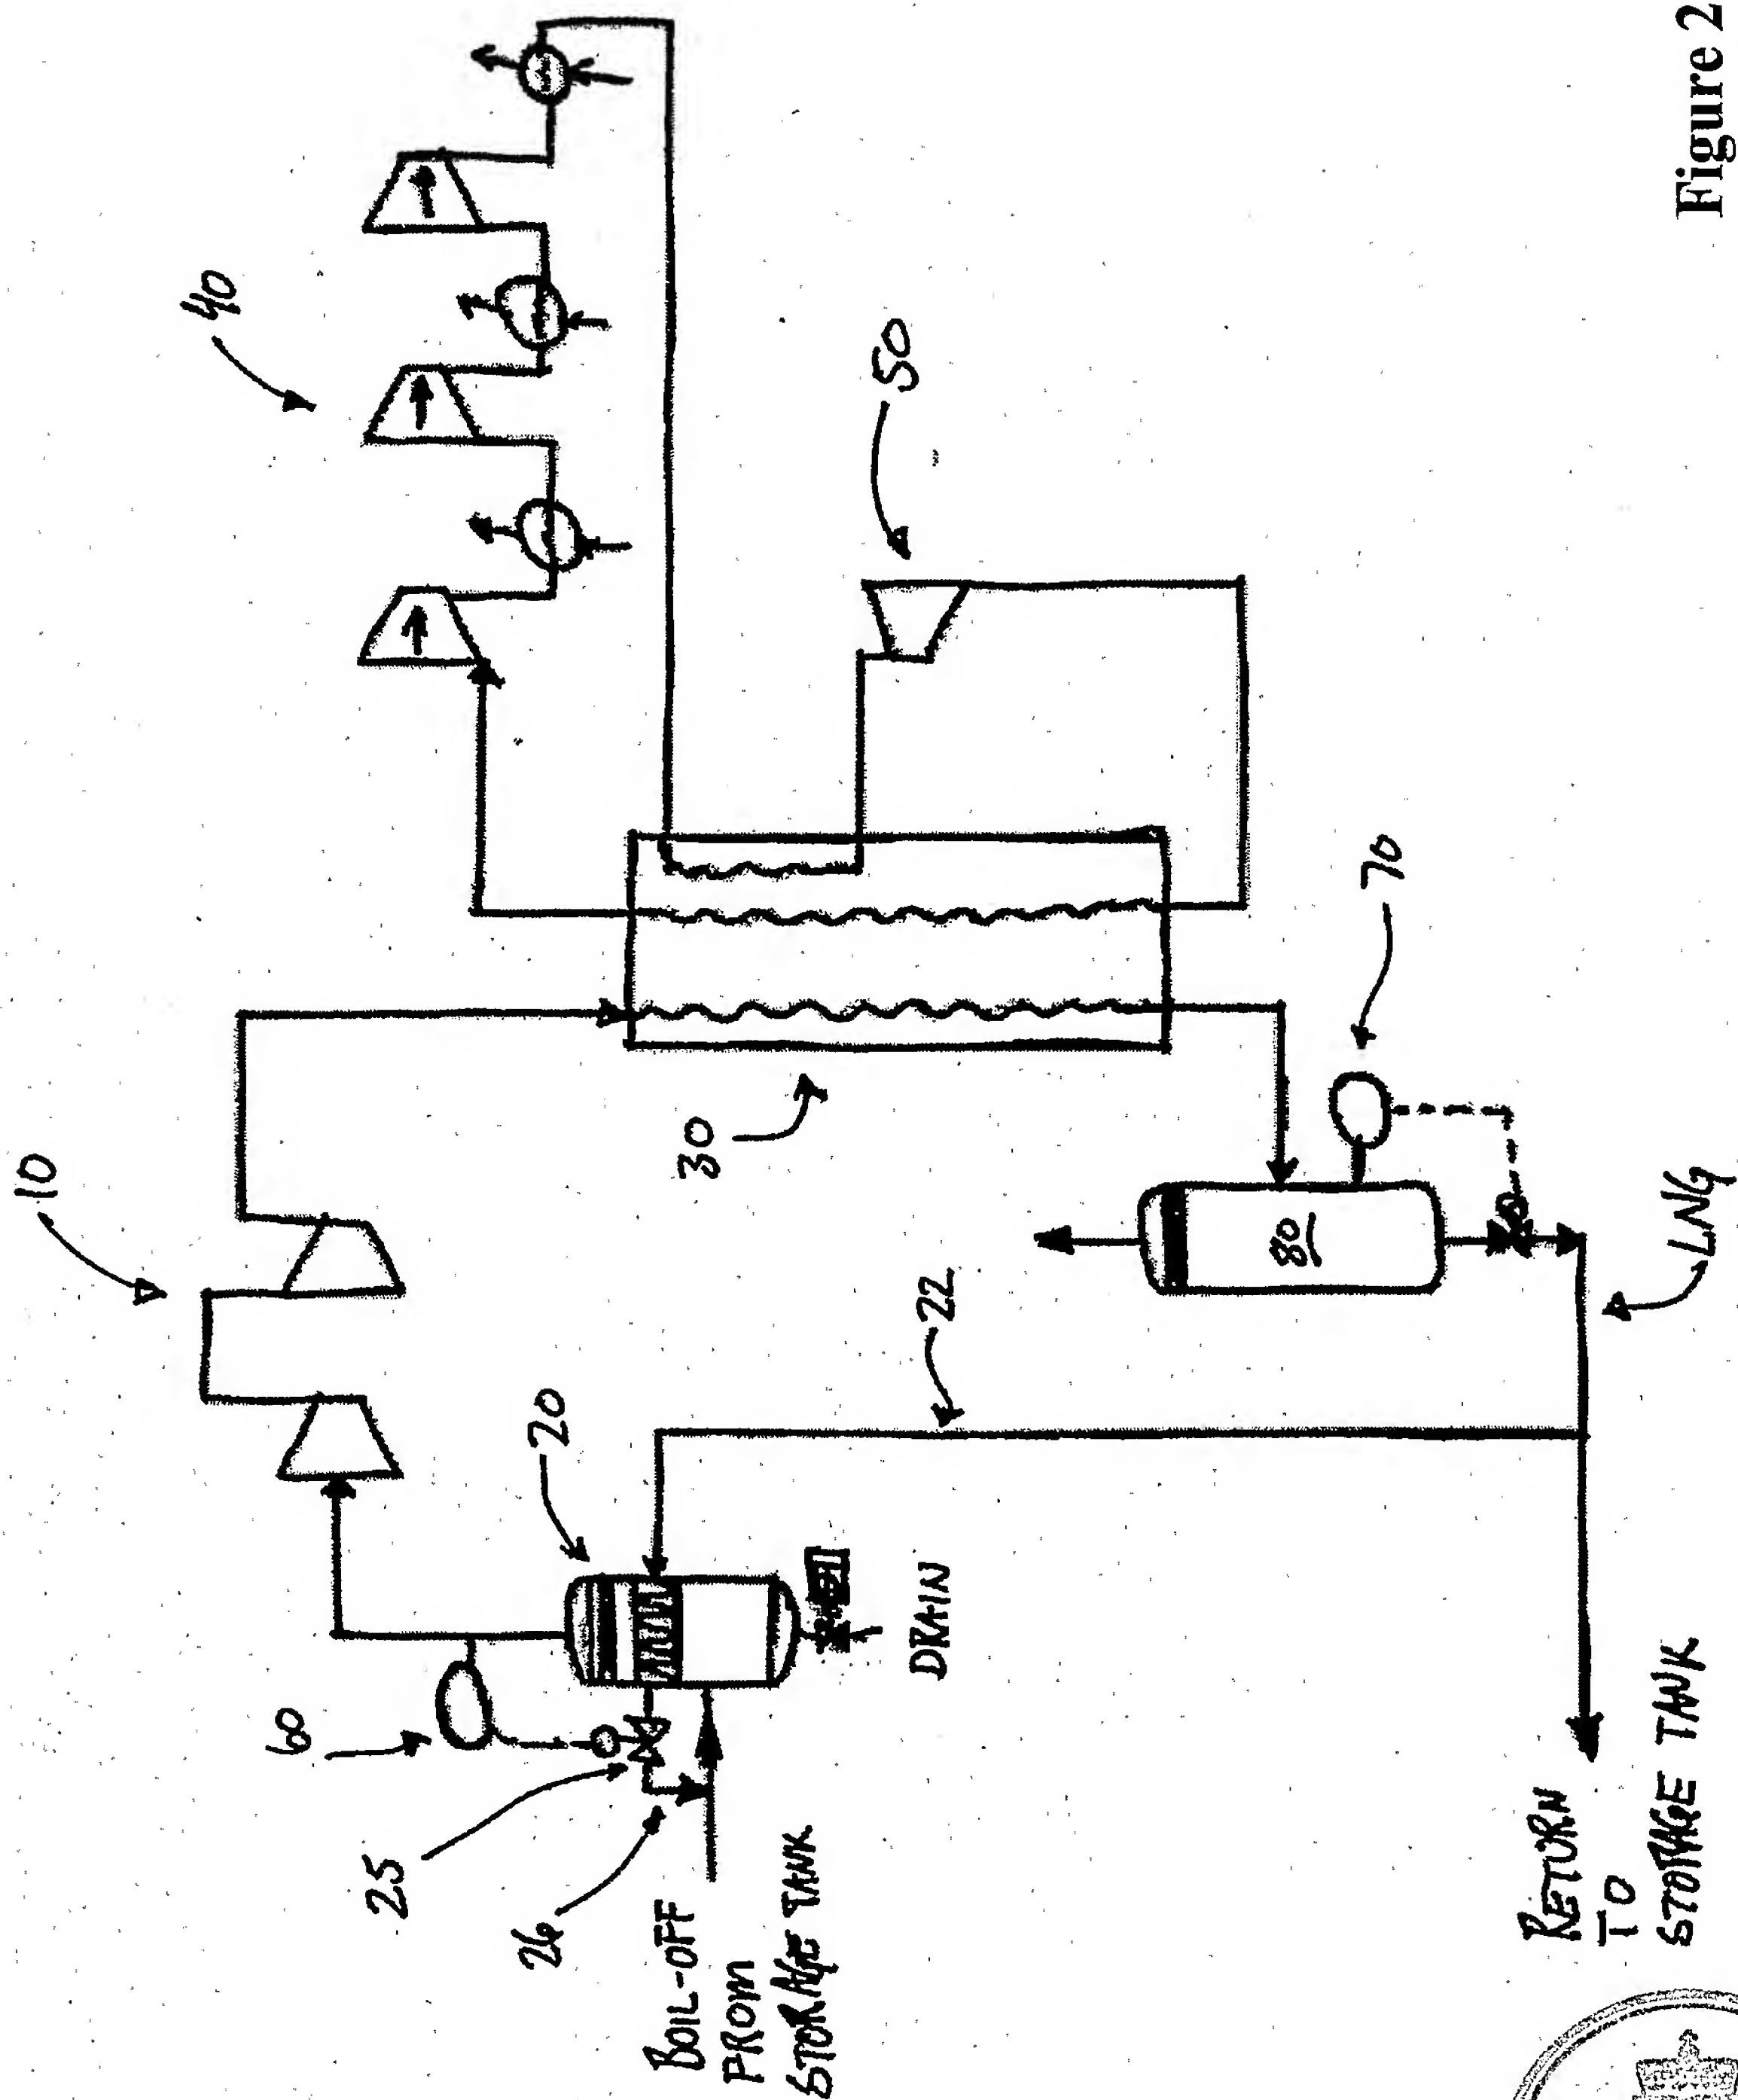
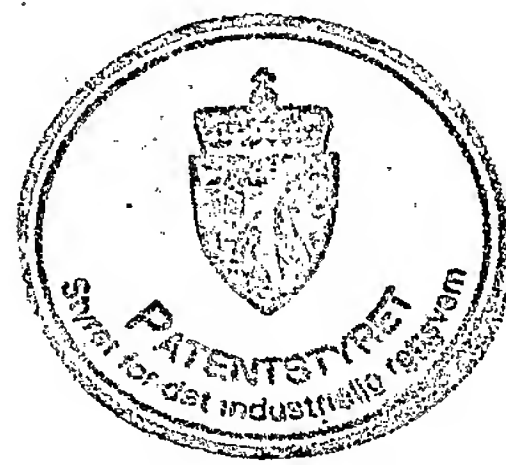


Figure 2



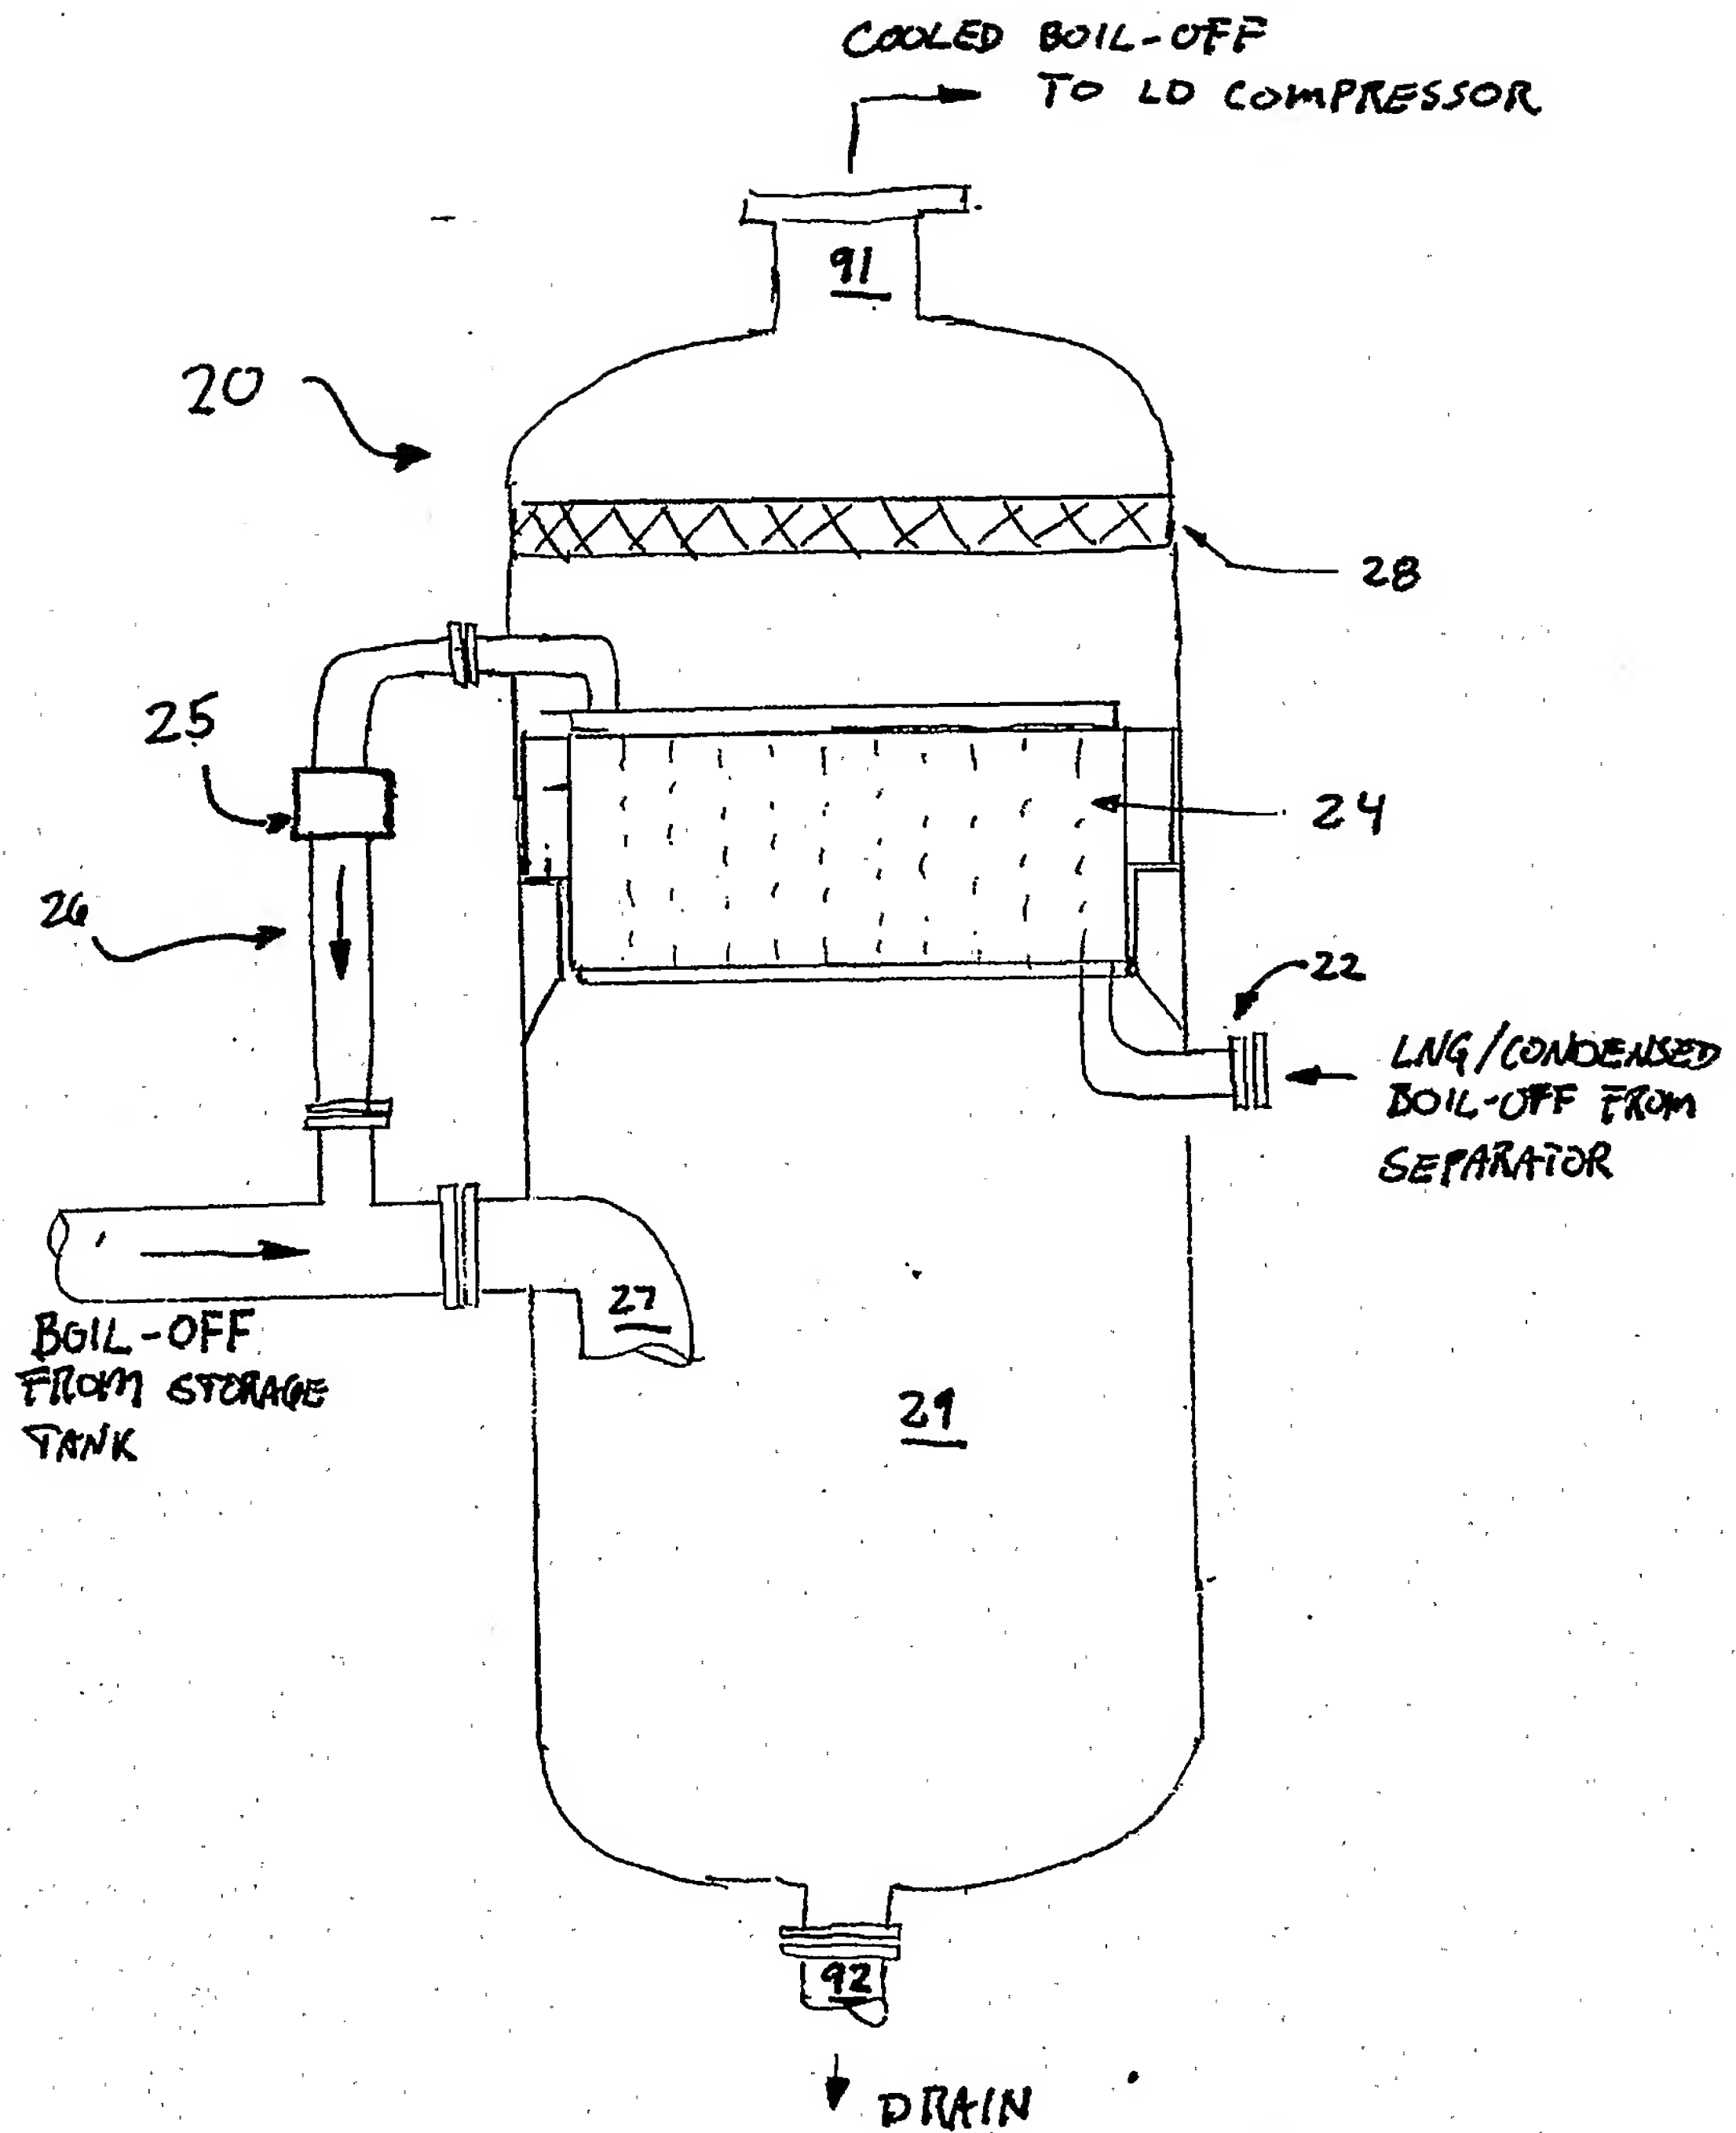


Figure 3

